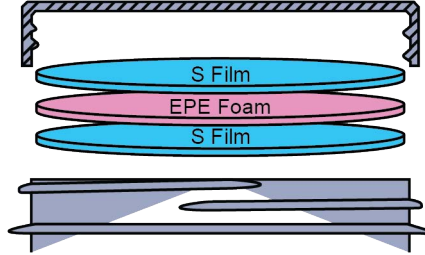


TRESYLENE™

Technical Data Sheet

TRESYLENE™ PE 2512 S

Revision: TRESYLENE-PE-2512-S-11272023

Product	TRESYLENE™ PE 2512 S														
Scope	Extruded closed cell foam produced from low-density PE faced with oxygen barrier film S on both sides. Foam density 250 kg/m ³ . Total thickness 1.2 mm.														
Composition	<table border="1"> <thead> <tr> <th>Material</th> <th>Standard</th> <th>Metric</th> </tr> </thead> <tbody> <tr> <td>S Film</td> <td>-</td> <td>-</td> </tr> <tr> <td>EPE Foam</td> <td>-</td> <td>1.2mm</td> </tr> <tr> <td>S Film</td> <td>-</td> <td>-</td> </tr> </tbody> </table>	Material	Standard	Metric	S Film	-	-	EPE Foam	-	1.2mm	S Film	-	-	 <p>Adhesive or resin bonding layers not shown.</p>	
Material	Standard	Metric													
S Film	-	-													
EPE Foam	-	1.2mm													
S Film	-	-													
FDA Status: 21 CFR 177.1210	Recommended Storage and Handling: Refer to website														
Drug Master File (DMF): 18475	EU / EP Reg.: 10/2011/EC														
GTR Oxygen:	MVTR:														
Print Location (if any):															

Selig materials are compliant with limitation of heavy metals in packaging per CONEG & EU 94/62/EC, article 11.

MSDS's are not required as Selig is not a chemical manufacturer or distributor and our products are 'articles' intended for food packaging per 29 CFR 1910.1200 (HazCom).

The information contained within this product data bulletin is to be used as a general guide in determining which structures are offered for sealing to specific container materials. All of the information which we provide is reliable to the best of our knowledge, but the accuracy thereof is not guaranteed. We suggest that consumers determine suitability for their own application.